

PRD
Sealed Rechargeable Battery
GM9 (2x9Ah/20HR)
(High Rate Discharge)

DO NOT RECHARGE OR REUSE
RECHARGEABLE BATTERIES
MUST BE RECHARGED IN
ACCORDANCE WITH THE
INSTRUCTIONS ON THE
PACKAGING. RECHARGE
ONLY IN A WELL-VENTILATED
AREA.

**SEALS LEAK BATTERIES
MUST BE RECHARGED IN
ACCORDANCE WITH THE
INSTRUCTIONS ON THE
PACKAGING. RECHARGE
ONLY IN A WELL-VENTILATED
AREA.**



28Wh
I.D.



ePRO

Sealed Rechargeable Battery

6FM9(12V9AH/20HR)

(High Rate Discharge)


Constant Voltage Charge

Cycle use	14.4-15.0V
Standby use	13.5-13.8V
Initial current	less than 2.7A

- DO NOT SHORT CIRCUIT
- RECHARGE AFTER USE



SEALED LEAD BATTERY
MUST BE RECYCLED OR
DISPOSED OF PROPERLY

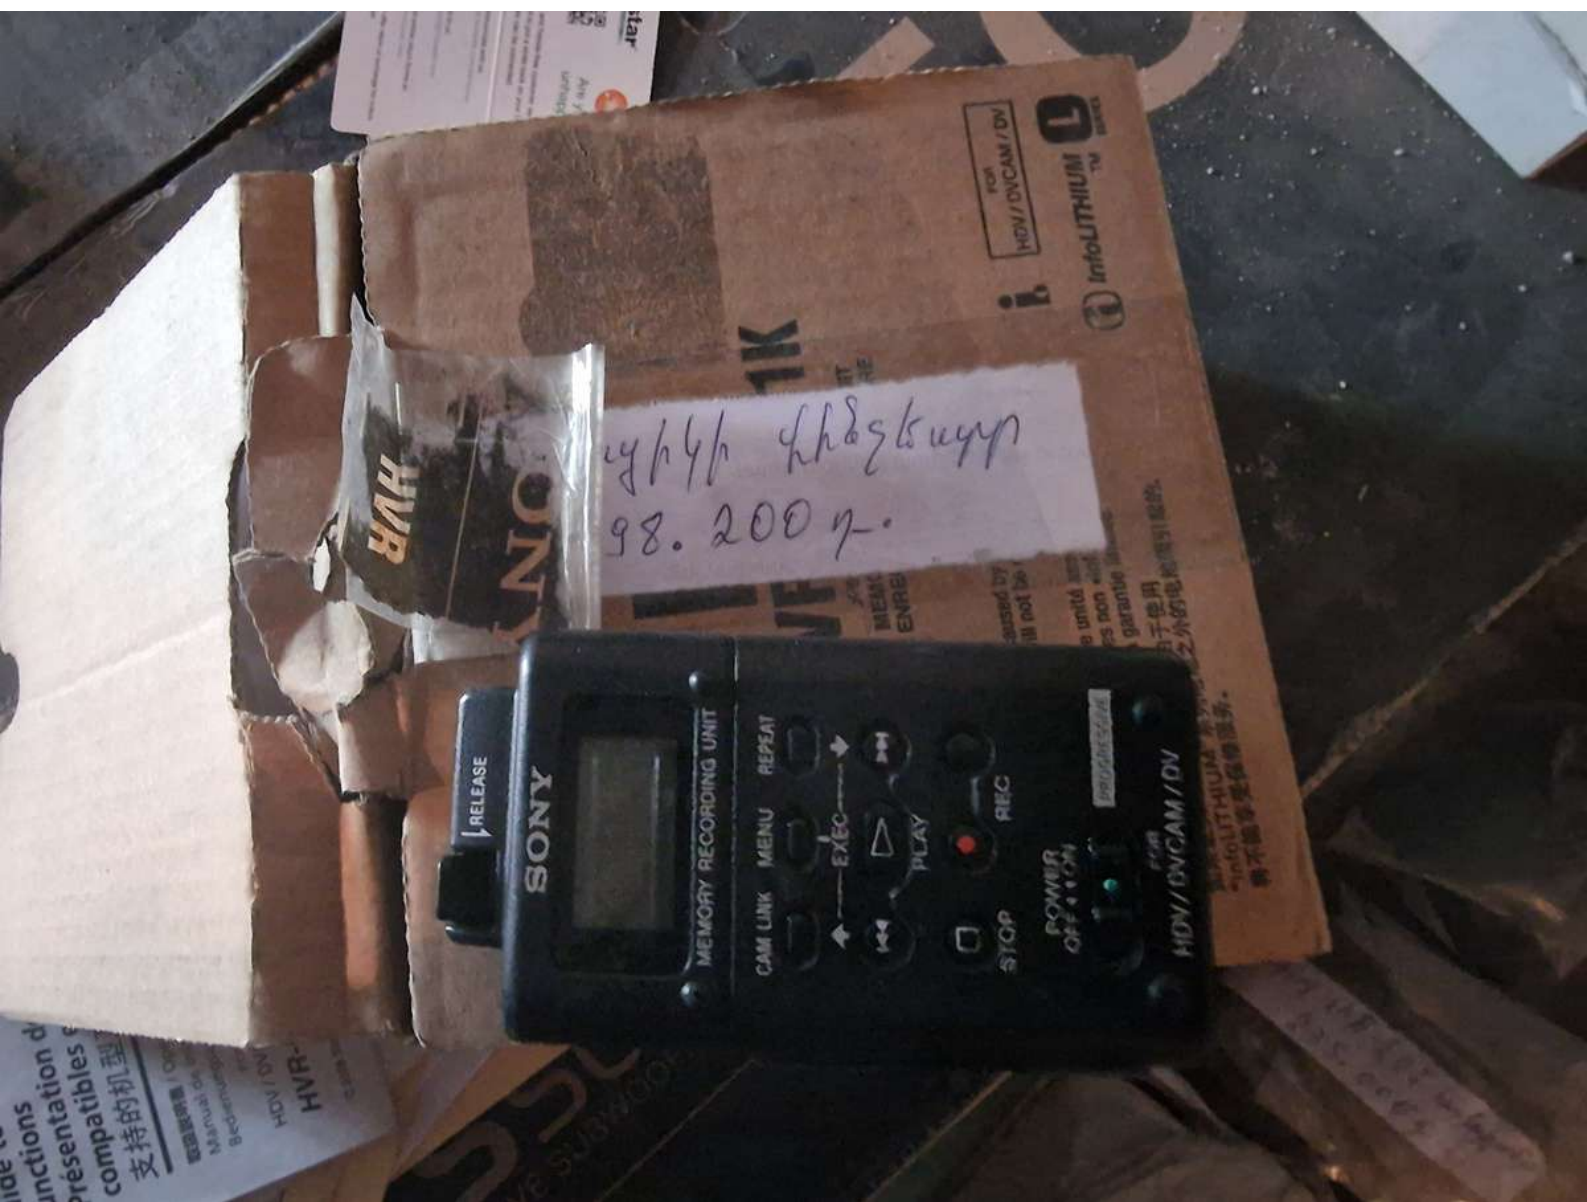

Handwritten note on the box:
98.200 r.
Универсальный

RELEASE
SONY
MEMORY RECORDING UNIT
CAM LINK MENU REPEAT
EXEC PLAY
STOP REC
POWER OFF ON
HVR-MC2000
HDV/DVCAM/DV

FOR HDV/DVCAM/DV
InfoLITHIUM™
LIONEL

functions d
presentation d
compatibles
支持的机型
Manual on
Bedienung
HDV/DV
HVR-

garantie
于每月
InfoLITHIUM
對不滿意者提供服務。

















7020



Հաշի Երևանի, լինանք
Տեսքի 12 քաղա
Արտադրողի Կազմակերպություն
ՊՈՍՏ 19137 - 89
« ԳՐԱՆԻՍ 19137 - 89 »
2017թ.
ԳԳ ՏՄ 82020392.3925 - 3004թ.







data video

DIGITAL VIDEO WRITER

TRANSITION

[Icon]	[Icon]	[Icon]	[Icon]
[Icon]	[Icon]	[Icon]	[Icon]
[Icon]	[Icon]	[Icon]	[Icon]
[Icon]	[Icon]	[Icon]	[Icon]

EFFECTS

ENTER	[Icon]	B/W	SD CLR
SETTING	[Icon]	PANO	BG CLR
VIDEO SETTING	[Icon]	MELAC	USER2
WV SETTING	[Icon]	USER1	

SPEED LEVEL

1	2
3	4
5	

CUT

FUNCTION KEYS

F2	F10	PVW
F1	FZ	
LOGO1 ON	PIP	
LOGO2 ON	PIB	
RES (RESET)		

NUMERICAL KEYS

9	8	7	6	5	4
0	1	2	3		

♻️ 04 PE-LD





Umlaufzeit
1005.
2004.

Kenko Co., Ltd.
Tokyo, Japan

58mm
E-UV

4961607283479


323.0009-

Stuurlijst Flyer

S10-0000

PDV-94N

DIGITAL VIDEO CASSETTE

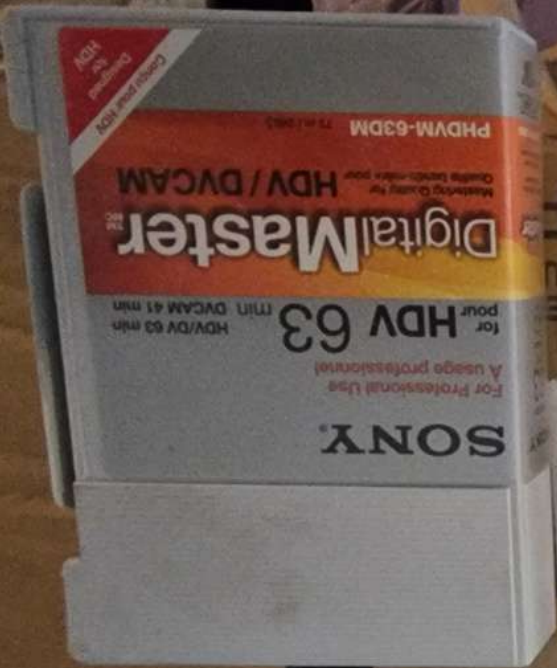

Use for 2
21.0009-
Stuvia & pph

